COOPER LIGHTING - METALUX®

WB SERIES

4' or 8' Surface
2 or 4 Lamps

SURFACE WIDE WRAPAROUND

- Equipped with energy saving ballast/complies with federal energy efficiency standards
- Low profile
- Low brightness/extruded acrylic refractor
- Injection molded end caps
- Die formed channel
- Baked white enamel finish
- Lift and shift refractor for ease of re-lamping
- Surface or stem mounting, single or continuous row [3]
- Also available in tandem 8' lengths
- UL/CUL Listed. Suitable for damp locations.

DESCRIPTION

The WB Series is a premium wraparound luminaire featuring wide body construction and energy efficient performance. The luminaire's characteristic clean, low profile design is both appealing and practically functional. The WB Series utilizes a clear, low brightness, extruded acrylic refractor with injection molded end caps for high performance and good looks The efficient and stylish wide body WB Series is the perfect wraparound for commercial spaces, schools, dormitories, offices and retail areas.

DIMENSIONS

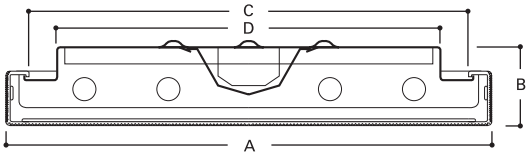

NOMINAL LENGTH	A	B	C	D
4'/8' 2 Lamp	12" (305mm)	2-7/8" (73mm)	10-5/8" (270mm)	8-3/16" (208mm)
4'/8' 4 Lamp	18" (457mm)	2-7/8" (73mm)	16-5/8" (422mm)	14-3/16" (360mm)

ORDERING INFORMATION

SAMPLE NUMBER: WB-232A-120V-EB81-U

Tandem
Blank=4' Length
8T=8' Length

WB=Series

Width
Blank=Standard
A=Wide Body for 2 Lamps

Number of Lamps
2 or **4** lamps
(Not Included)

Wattage (Length)
40=40W T12 (48")
32=32W T8 (48")

Lens
A=Acrylic Refractor/Lens

Voltage [1]
120V=120 Volt
277V=277 Volt
347V=347 Volt
UNV=Universal Voltage 120-277 [2]

Options
GL=Single Element Fuse
GM=Double Element Fuse
Emergency - for EM installed, see EM options table

Ballast Type [1]
LE3=T12 Magnetic Energy Saving
EB8_=T8 Electronic Instant Start. Total Harmonic Distortion < 10%
No. of Ballast
1, 2 or 3
EB8_**/PLUS**= T8 Electronic Instant Start. High Ballast Factor >1.13. Total Harmonic Distortion < 20%
No. of Ballast
1, 2 or 3
ER8_=T8 Electronic Program Rapid Start. Total Harmonic Distortion < 10%
No. of Ballast
1, 2 or 3
EB2_=T12 Electronic Rapid Start.
No. of Ballast
1 or 2
(For complete details on generic or to specify manufacturer's ballast see pg. 469)

Options
(See Options Section)

Packaging
U=Unit Pack

NOTES: [1]Products also available in non-US voltages and frequencies for international markets. [2]Not available when specifying emergencies, voltage must be specific. [3]2 point suspension recommended.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.